



FPS-60 AUTO SLEEVING MACHINE FOR TRAYS AND CUPS



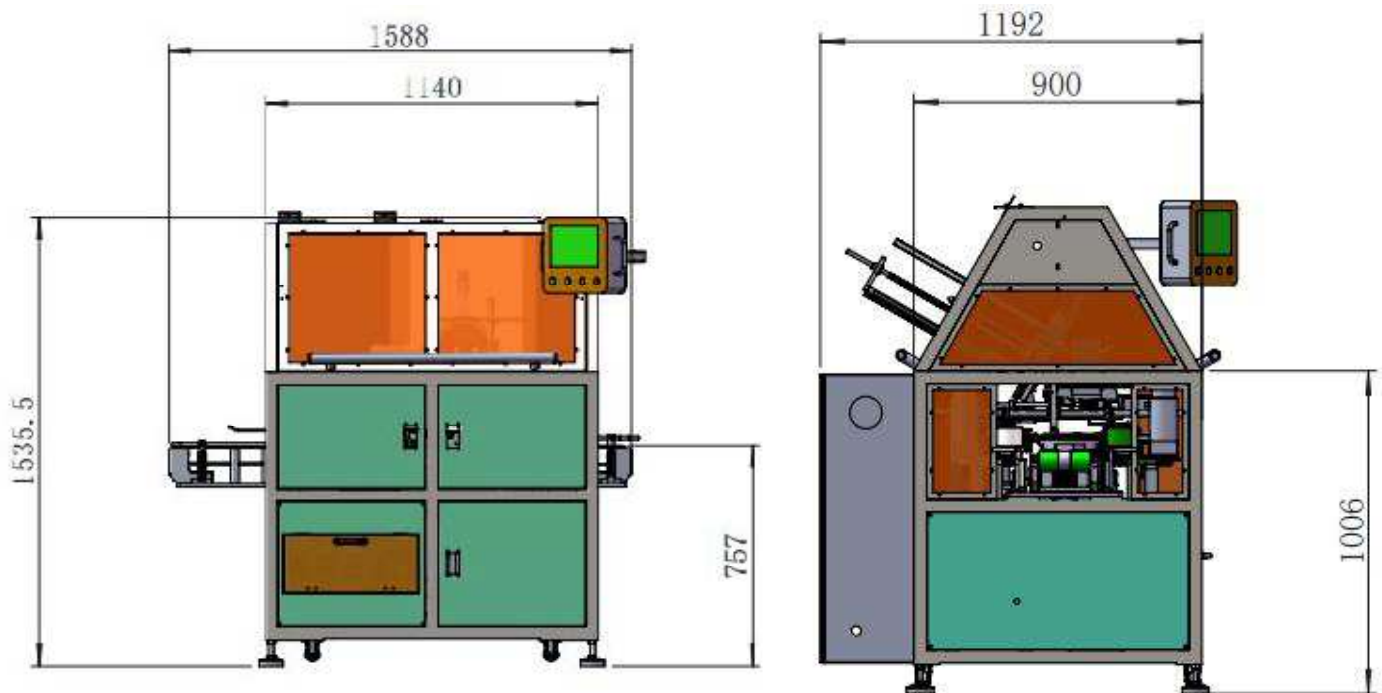
KEY FEATURES :

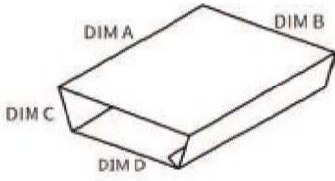
- Continuous motion
- Max Speeds up to 60 packs per minute
- Small footprint and low power consumption
- Simple low maintenance design features
- Runs pre-glued sleeves
- Robust stainless steel construction
- Available for loose produce sleeving
- (tray with sleeve, apples, pears, kiwis, tomatoes ..)
- Available for skin pack sleeving
- Machine can online with gas vacuum sealing machine or auto production

Office: F-402, ROSE GARDEN , Opp. DELTA GARDEN, ISKON MANDIR ROAD, MIRA ROAD EAST ,THANE- 401107.

Works: C8 , PRIME INDL. ESTATE, DEVDAL VILLAGE, SAGPADA ROAD ,Nr.DRAGGER WAREHOUSE,
Opp. BHAJANLAL DAIRY,VASAI EAST, PALGHAR- 401208, Tel.: (+91) 93200 53305

<http://firstpackautomation.com> , Email : sales@firstpackautomation.com, sales.firstpackautomation@gmail.com

**MACHINE PHOTO :****TECHNICAL DETAIL :**

	Tray size: DIM A:100-260mm DIM B:90-260mm DIM C:25-75mm DIM D:60-220mm Details depends on products.
Speed	60 PCS/min Depends on the shape of the tray and the tightness of the sleeve
Power	1.5 KW
Voltage power supply	220V (50-60 Hz)
Air source	0.5-0.8 MPa
Output Height	700 (+/-100) mm
Dimensions (LXWXH)	1588 X 1192 X 1535 mm

**ADVANTAGES:**

- 1, Date save function, we can save different size of product machine parameter on Touch screen, it can quickly load data, easy and fast exchange product. Remote control HFM for quick diagnostics and support.
- 2, Mitsubishi PLC and 4 Servo motor control
- 3, Built in vacuum pump, end user can only need external connect small Blowing air Source
- 4, Accurate adjustment with scale , easy and convenient
- 5, WIFI touch screen can remote check machine work situation and upgrade, can customize make Lock for avoid worker incorrect operation
- 6, Big size range product are workable, max260*260mm, min60*60mm(depends on product shape and sleeve tightness)

samples :